

TRIO - LED

LED SERIES




VR ARCHITECTURAL LUMINAIRE

LED
12-5/8" x 7-1/8" x 4"



PROJECT:
TYPE:
PRODUCT NUMBER:
APPROVED BY:
DATE:

DIMENSIONAL DATA

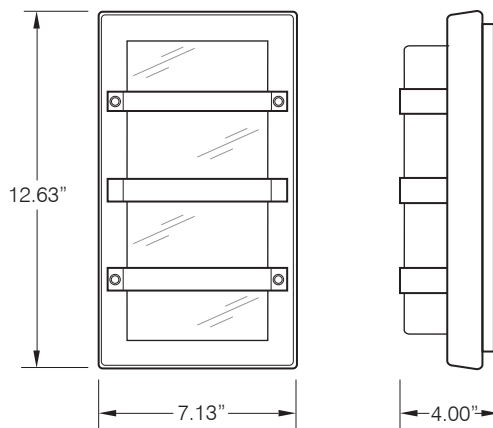

DESCRIPTION

This architectural fixture offers an innovative solution for upscale, smart illumination without compromising strength. When the aesthetics and design is as important its durability, this vandal resistant fixture is the answer. The housing and face plate are both die-cast aluminum and provides exceptional durability and stability in the harshest of environments. We are pleased to offer a solution for higher end applications with our architectural luminaries. This fixture is IP65 rated, dust proof, splash proof and rugged enough for any demanding situation. This is ideal for any installation requiring a design oriented luminaire while delivering protection from the extremes of Mother Nature or defacement from vandalism.

APPLICATION

- Public Areas
- Schools
- Hospitality
- Exterior Wall
- Corridors/Stairways
- Underpasses

SPECIFICATION FEATURES

HOUSING:

Die cast, one piece in low copper, high magnesium marine application aluminum alloy.

LENS:

UV stabilized white opal polycarbonate.

ELECTRONICS:

Electronic Ballast <10% THD standard. Lamps by others.

LED:

9.6W on 2 LED modules. Available in two color temperatures (3000° K & 5000° K).

REFLECTOR:

.40" thick white aluminum for high reflectivity.
- for LED Aluminum reflector to serve as heat sink and unitized with electrical components.

GASKET:

An injection molded, continuous piece silicone rubber gasket to prevent infiltration.

FASTENERS:

Allen head screws (without center pin) - standard.

FINISH:

Extremely durable oven baked polyester powdercoat following a 5 stage iron phosphate pre-treatment in Black or White.

LABEL:   





TRIO - LED


LED SERIES

VR ARCHITECTURAL LUMINAIRE

LED

12-5/8" x 7-1/8" x 4"

MOUNTING DIMENSIONS

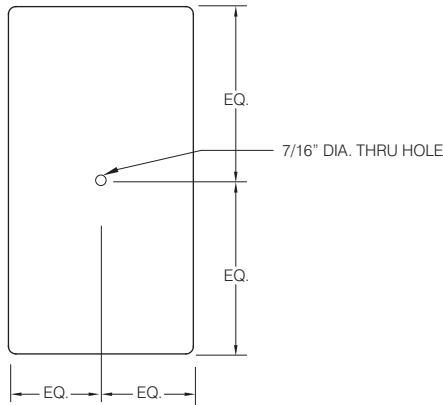

ORDERING INFORMATION

TRIO - LED VR ARCHITECTURAL LUMINAIRE LED SERIES

